




# SPEED VORTEX

VORTEX submersible pump

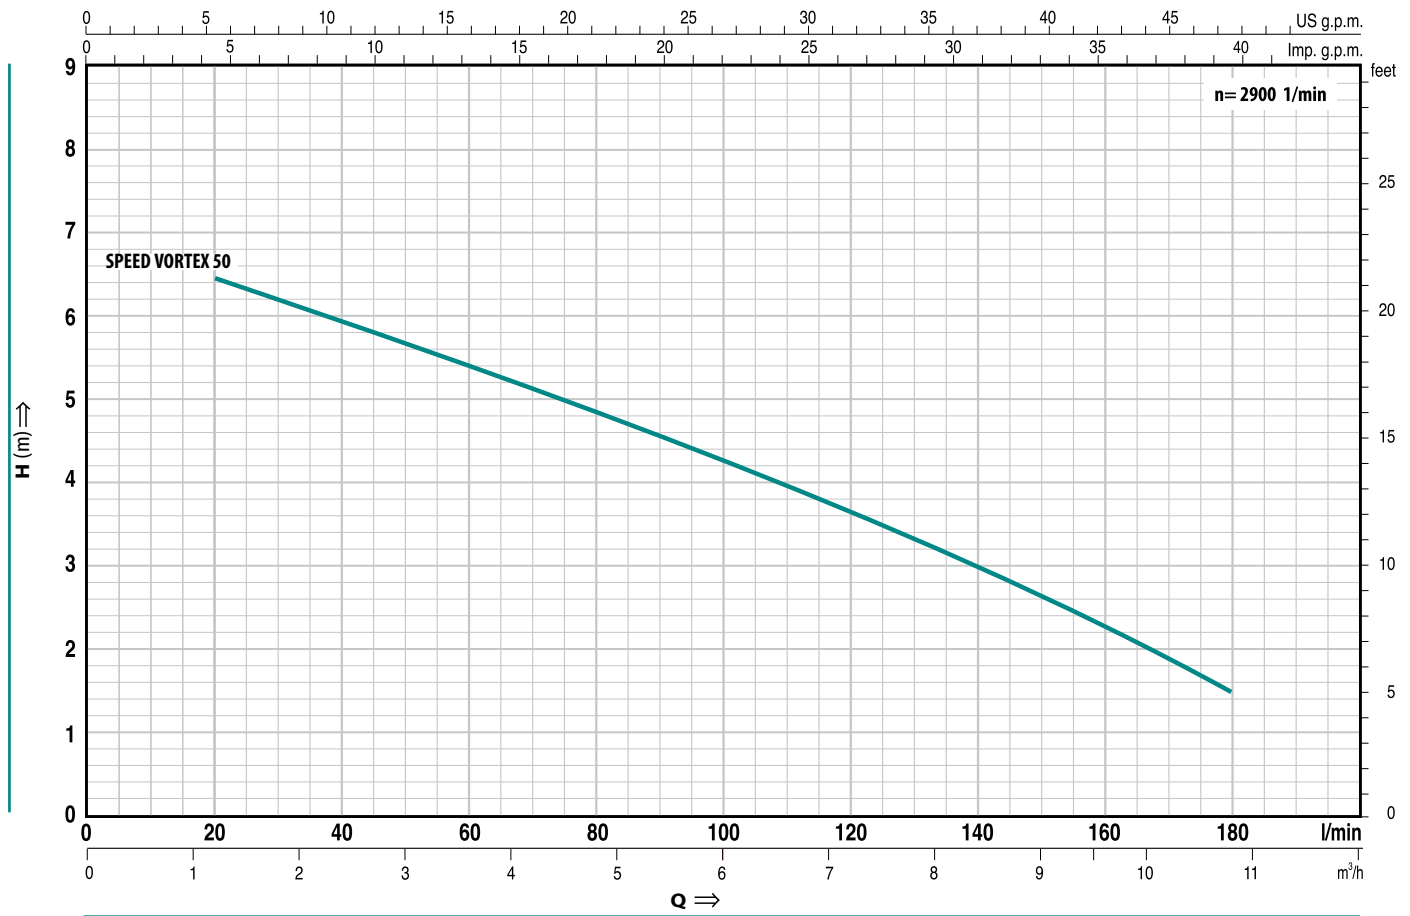

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE	POWER		m³/h l/min	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8
	kW	HP		0	20	40	60	80	100	120	140	160	180
SPEED VORTEX 50M	0.37	0.50	H metres	7	6.5	6	5.4	4.8	4.2	3.5	3	2.5	1.5

## DIMENSIONS AND WEIGHTS

TYPE	PORT DN	DIMENSIONS mm							kg
		a	h	h1	d	e	p	∅	
SPEED VORTEX 50M	1 1/4"	152	288	268	25	adjustable	350	350	5.0



#### RANGE OF PERFORMANCE

Flow rate up to 180 l/min (10.8 m<sup>3</sup>/h)

Head up to 7 m

#### LIMITS OF USE

Depth up to 3 m

Liquid temperature up to + 40°C

(+90°C for a maximum period of 3 minutes)

Passage of solid bodies up to Ø 20 mm

Drainage level 25 mm from the bottom

#### INSTALLATION AND USE

THE SPEED VORTEX PUMP IS SUITABLE FOR DRAINING DIRTY WATER THAT IS CHEMICALLY NON AGGRESSIVE. THE CONSTRUCTION GUARANTEES SIMPLE AND SAFE OPERATION DUE TO THE COMPLETE COOLING OF THE MOTOR BY THE PUMPED WATER AND THE DOUBLE SEAL DESIGN.

IT IS RECOMMENDED FOR DOMESTIC USE, FOR THE CLEARING OF DIRTY WATER, FOR EMPTYING TANKS, DOMESTIC DRAINS AND COLLECTION TRAPS, EVEN WITH SUSPENDED SOLID BODIES WITH DIMENSIONS UP TO Ø 20 mm.

#### GUARANTEE 2 YEARS:

subject to our general terms of sale.

#### CONSTRUCTION CHARACTERISTICS

##### • DELIVERY BODY:

glass filled **technopolymer**, particularly resistant to impact and corrosion, with threaded port ISO 228/1.

##### • SUCTION GRID: **technopolymer**.

##### • IMPELLER: **technopolymer**.

##### • MOTOR SUPPORT: **stainless steel AISI 304**.

##### • MOTOR SHAFT:

**stainless steel EN 10088-3 - 1.4104**.

##### • DOUBLE SEAL:

**mechanical seal ceramic - graphite - NBR**, with oil barrier chamber and inner lip seal to protect the seal in the event of dry running.

##### • MOTOR:

submersible asynchronous single-phase for continuous duty.

##### SPEED VORTEX 50M:

single-phase 220÷240 V - 50 Hz with capacitor and thermal overload protector.

##### • INSULATION: class F.

##### • PROTECTION: IP 68.

#### STANDARD FEATURES:

- Float switch.
- Hosetail.
- Neoprene power cable "H05 RN-F"
- length **5 metres** with Schuko plug.

#### OPTIONS ON REQUEST

- ⇒ special mechanical seal
- ⇒ 10 metres power cable. N.B. required for outdoor use to comply with standard EN 60335-2-41
- ⇒ other voltages or frequency 60 Hz

#### CONSTRUCTION AND SAFETY STANDARDS

EN 60 335-1

EN 60034-1

IEC 335-1


IEC 34-1

CEI 61-150

CEI 2-3



## DIMENSIONS

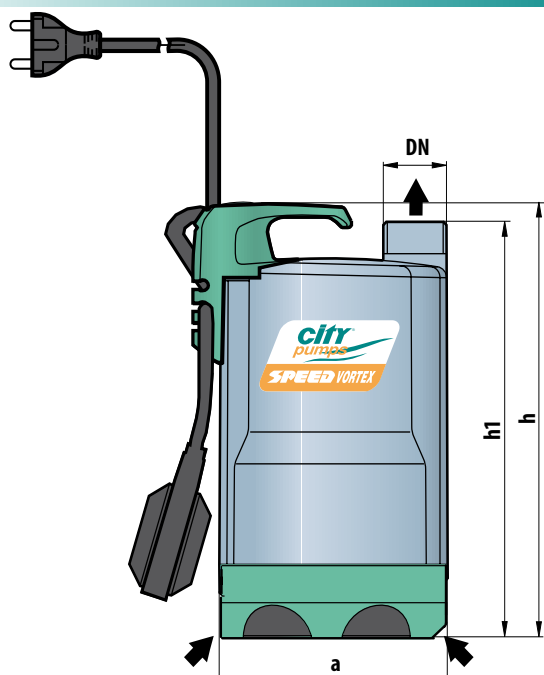

#### Typical installation

